






Poleas Sincrónicas Standard con Agujero Piloto (MPB)

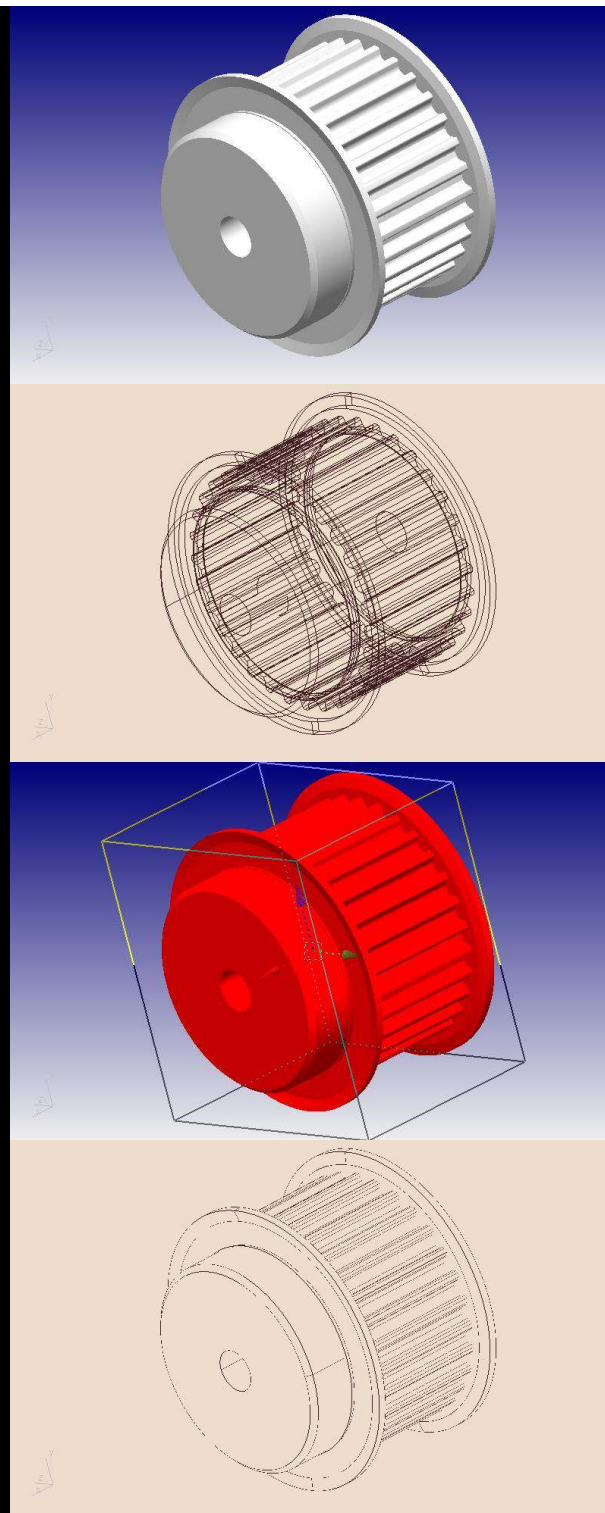


TIPO XL – PASO 5,08 MM PARA CORREA ANCHO 037 (9,525 MM)										
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
10 XL 037	10	6F	ACERO	16,17	15,66	23	9,5	14,3	20	-
11 XL 037	11	6F	ACERO	17,79	17,28	23	9,5	14,3	20	-
12 XL 037	12	6F	ACERO	19,40	18,90	25	10	14,3	20	-
13 XL 037	13	6F	ACERO	21,02	20,51	25	10	14,3	20	-
14 XL 037	14	6F	ACERO	22,64	22,13	28	15	14,3	20	-
15 XL 037	15	6F	ACERO	24,26	23,75	28	15	14,3	20	-
16 XL 037	16	6F	ACERO	25,87	25,36	32	16	14,3	20	-
17 XL 037	17	6F	ACERO	27,49	26,98	32	20	14,3	20	-
18 XL 037	18	6F	ACERO	29,11	28,6	35	20	14,3	20	-
19 XL 037	19	6F	ACERO	30,72	30,22	35	20	14,3	22	-
20 XL 037	20	6F	ACERO	33,34	31,83	38	23,5	14,3	22	-
21 XL 037	21	6F	ACERO	33,96	33,45	38	23,5	14,3	22	-
22 XL 037	22	6F	ACERO	35,57	35,07	42	25	14,3	22	-
24 XL 037	24	6F	ACERO	38,81	38,30	44	30	14,3	22	8
26 XL 037	26	6F	ACERO	42,04	41,53	48	30	14,3	22	8
27 XL 037	27	6F	ACERO	43,66	43,15	48	34	14,3	22	8
28 XL 037	28	6F	ACERO	45,28	44,77	51	34	14,3	22	8
29 XL 037	29	6F	ACERO	46,89	46,39	51	34	14,3	22	8
30 XL 037	30	6F	ACERO	48,51	48,00	54	38	14,3	22	8
32 XL 037	32	6F	ACERO	51,74	51,24	57	38	14,3	25	8
34 XL 037	34	6	ACERO	54,98	54,47	-	45	14,3	25	8
35 XL 037	35	6	ACERO	56,60	56,09	-	45	14,3	25	8
36 XL 037	36	6	ACERO	58,21	57,70	-	45	14,3	25	8
38 XL 037	38	6	ACERO	61,45	60,94	-	45	14,3	25	8
39 XL 037	39	6	ACERO	63,06	62,56	-	45	14,3	25	8
40 XL 037	40	6	ACERO	64,68	64,17	-	45	14,3	25	8
41 XL 037	41	6	ACERO	66,30	65,79	-	45	14,3	25	8
42 XL 037	42	6	ACERO	67,91	67,41	-	45	14,3	25	8
43 XL 037	43	6	ACERO	69,53	69,02	-	45	14,3	25	8
44 XL 037	44	6	ACERO	71,15	70,64	-	45	14,3	25	8
45 XL 037	45	6W	ACERO	72,77	72,26	-	45	14,3	25	10
46 XL 037	46	6W	ACERO	74,38	73,87	-	45	14,3	25	10
47 XL 037	47	6W	ACERO	76,00	75,49	-	45	14,3	25	10
48 XL 037	48	6W	ACERO	77,62	77,11	-	45	14,3	25	10
49 XL 037	49	6W	ACERO	79,23	78,73	-	45	14,3	25	10
52 XL 037	52	6W	ACERO	84,08	83,58	-	45	14,3	25	10
56 XL 037	56	6W	ACERO	90,55	90,04	-	45	14,3	25	10
57 XL 037	57	6W	ACERO	92,17	91,66	-	45	14,3	25	10
58 XL 037	58	6W	ACERO	93,79	93,28	-	45	14,3	25	10
59 XL 037	59	6W	ACERO	95,40	94,90	-	45	14,3	25	10
60 XL 037	60	6W	ACERO	97,02	96,51	-	45	14,3	25	10
68 XL 037	68	6W	ACERO	109,96	109,45	-	45	14,3	25	10
69 XL 037	69	6W	ACERO	111,57	111,07	-	45	14,3	25	10
70 XL 037	70	6W	ACERO	113,19	112,68	-	45	14,3	25	10
71 XL 037	71	6W	ACERO	114,81	114,30	-	45	14,3	25	10
72 XL 037	72	6W	ACERO	116,42	115,92	-	45	14,3	25	10

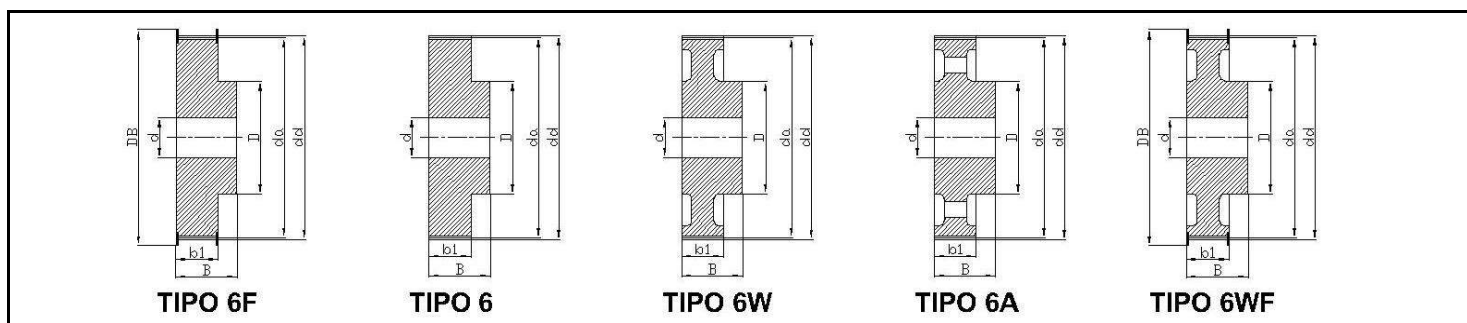


TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO L – PASO 9,525 MM PARA CORREA ANCHO 050 (12,7 MM)

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
10 L 050	10	6F	ACERO	30,32	29,56	36	20	19	28	8
11 L 050	11	6F	ACERO	33,37	32,31	37	28	19	30	8
12 L 050	12	6F	ACERO	36,38	35,62	43	28	19	30	8
13 L 050	13	6F	ACERO	39,41	38,65	44	28	19	30	8
14 L 050	14	6F	ACERO	42,45	41,68	48	28	19	30	8
15 L 050	15	6F	ACERO	45,48	44,72	51	34	19	30	8
16 L 050	16	6F	ACERO	48,51	47,75	54	36	19	32	8
17 L 050	17	6F	ACERO	51,54	50,78	57	36	19	32	10
18 L 050	18	6F	ACERO	54,57	53,81	60	40	19	32	10
19 L 050	19	6F	ACERO	57,61	56,84	64	40	19	32	10
20 L 050	20	6F	ACERO	60,64	59,88	66	40	19	32	10
21 L 050	21	6F	ACERO	63,67	62,91	70	45	19	32	10
22 L 050	22	6F	ACERO	66,70	65,94	75	45	19	32	10
23 L 050	23	6F	ACERO	69,73	68,97	79	55	19	32	10
24 L 050	24	6F	ACERO	72,77	72,00	79	55	19	32	10
25 L 050	25	6F	ACERO	75,80	75,04	82,5	58	19	32	10
26 L 050	26	6F	ACERO	78,83	78,07	86	58	19	32	11
27 L 050	27	6F	ACERO	81,86	81,10	86	58	19	32	11
28 L 050	28	6F	ACERO	84,89	84,13	91	58	19	32	11
29 L 050	29	6F	ACERO	87,93	87,16	94	58	19	32	11
30 L 050	30	6F	ACERO	90,96	90,20	97	70	19	32	11
32 L 050	32	6F	ACERO	97,02	96,26	102	70	19	32	11
33 L 050	33	6F	ACERO	100,05	99,29	106	70	19	32	11
34 L 050	34	6F	ACERO	103,08	102,32	112	70	19	32	11
35 L 050	35	6F	ACERO	106,12	105,35	112	70	19	32	11
36 L 050	36	6F	ACERO	109,15	108,39	115	70	19	32	11
40 L 050	40	6WF	ACERO	121,28	120,51	128	70	19	32	11
41 L 050	41	6WF	ACERO	124,31	123,55	135	70	19	32	11
42 L 050	42	6WF	ACERO	127,34	126,58	135	70	19	32	11
44 L 050	44	6WF	ACERO	133,40	132,64	142	70	19	32	11
45 L 050	45	6WF	ACERO	136,44	135,67	142	70	19	32	11
47 L 050	47	6WF	ACERO	142,50	141,74	150	70	19	32	11
48 L 050	48	6WF	ACERO	145,53	144,77	150	70	19	32	11
49 L 050	49	6W	F.GRIS	148,56	147,80	-	70	19	32	14
50 L 050	50	6W	F.GRIS	151,60	150,83	-	70	19	32	14
52 L 050	52	6W	F.GRIS	157,66	156,90	-	70	19	32	14
56 L 050	56	6W	F.GRIS	169,79	169,02	-	70	19	32	14
57 L 050	57	6W	F.GRIS	172,82	172,06	-	70	19	32	14
60 L 050	60	6W	F.GRIS	181,91	181,15	-	75	19	42	14
65 L 050	65	6A	F.GRIS	197,07	196,31	-	75	19	42	14
66 L 050	66	6A	F.GRIS	200,11	199,34	-	75	19	42	14
72 L 050	72	6A	F.GRIS	218,30	217,53	-	75	19	42	14
84 L 050	84	6A	F.GRIS	254,68	253,92	-	75	19	42	14
90 L 050	90	6A	F.GRIS	272,87	272,11	-	75	19	42	14
96 L 050	96	6A	F.GRIS	291,06	290,30	-	75	19	42	14
120 L 050	120	6A	F.GRIS	363,83	363,07	-	75	19	42	14




TRANSMISIONES
GALICIA

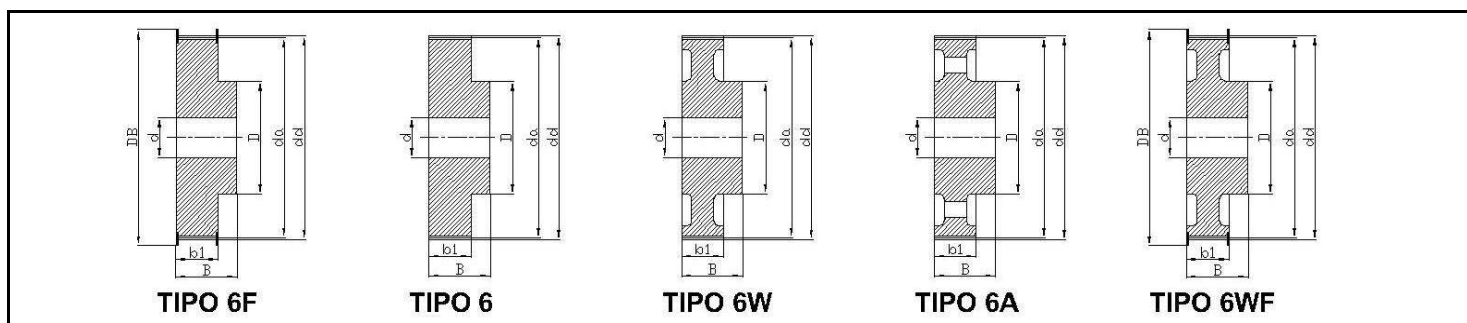


TIPO L – PASO 9,525 MM PARA CORREA ANCHO 075 (19,05 MM)										
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
10 L 075	10	6F	ACERO	30,32	29,56	37	20	20	38	8
11 L 075	11	6F	ACERO	33,35	32,59	37	22	20	38	8
12 L 075	12	6F	ACERO	36,38	35,62	43	24	20	38	8
13 L 075	13	6F	ACERO	39,41	38,65	44	28	20	38	8
14 L 075	14	6F	ACERO	42,45	41,68	48	28	20	38	11
15 L 075	15	6F	ACERO	45,48	44,72	51	34	20	38	11
16 L 075	16	6F	ACERO	48,51	47,75	54	36	20	38	11
17 L 075	17	6F	ACERO	51,54	50,78	57	36	20	38	11
18 L 075	18	6F	ACERO	54,57	53,81	60	40	20	38	11
19 L 075	19	6F	ACERO	57,61	56,84	64	40	20	38	11
20 L 075	20	6F	ACERO	60,64	59,88	66	40	20	38	11
21 L 075	21	6F	ACERO	63,67	62,91	70	45	20	38	11
22 L 075	22	6F	ACERO	66,70	65,94	75	45	20	38	11
23 L 075	23	6F	ACERO	69,73	68,97	79	55	20	38	11
24 L 075	24	6F	ACERO	72,77	72,00	79	55	20	38	11
25 L 075	25	6F	ACERO	75,80	75,04	83	58	20	38	11
26 L 075	26	6F	ACERO	78,83	78,07	87	58	20	38	11
27 L 075	27	6F	ACERO	81,86	81,10	87	58	20	38	11
28 L 075	28	6F	ACERO	84,89	84,13	91	58	20	38	11
29 L 075	29	6F	ACERO	87,93	87,16	93	58	20	38	11
30 L 075	30	6F	ACERO	90,96	90,20	97	70	20	38	11
32 L 075	32	6F	ACERO	97,02	96,26	102	70	20	38	11
33 L 075	33	6F	ACERO	100,05	99,29	106	70	20	38	11
34 L 075	34	6F	ACERO	103,08	102,32	112	70	20	38	11
35 L 075	35	6F	ACERO	106,12	105,35	112	70	20	38	11
36 L 075	36	6F	ACERO	109,15	108,39	128	70	20	38	11
40 L 075	40	6WF	ACERO	121,28	120,51	128	70	20	38	11
41 L 075	41	6WF	ACERO	124,31	123,55	135	70	20	38	11
42 L 075	42	6WF	ACERO	127,34	126,58	135	70	20	38	11
44 L 075	44	6WF	ACERO	133,40	132,64	142	70	20	38	11
45 L 075	45	6WF	ACERO	136,44	135,67	150	70	20	38	11
47 L 075	47	6WF	ACERO	142,50	141,74	150	70	20	38	11
48 L 075	48	6WF	ACERO	145,53	144,77	150	70	20	38	11
49 L 075	49	6W	F.GRIS	148,56	147,80	-	70	20	38	14
50 L 075	50	6W	F.GRIS	151,60	150,83	-	70	20	38	14
52 L 075	52	6W	F.GRIS	157,66	156,90	-	70	20	38	14
56 L 075	56	6W	F.GRIS	169,79	169,02	-	70	20	38	14
57 L 075	57	6W	F.GRIS	172,82	172,06	-	70	20	38	14
60 L 075	60	6W	F.GRIS	181,91	181,15	-	75	20	45	14
65 L 075	65	6A	F.GRIS	197,07	196,31	-	75	20	45	14
66 L 075	66	6A	F.GRIS	200,11	199,34	-	75	20	45	14
72 L 075	72	6A	F.GRIS	218,30	217,53	-	75	20	45	14
84 L 075	84	6A	F.GRIS	254,68	253,92	-	75	20	45	14
90 L 075	90	6A	F.GRIS	272,87	272,11	-	75	20	45	14
96 L 075	96	6A	F.GRIS	291,06	290,30	-	75	20	45	14
120 L 075	120	6A	F.GRIS	363,83	363,07	-	75	20	45	14




TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO L – PASO 9,525 MM PARA CORREA ANCHO 100 (25,4 MM)


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
10 L 100	10	6F	ACERO	30,32	29,56	37	20	31,8	45	8
11 L 100	11	6F	ACERO	33,35	32,59	37	22	31,8	45	8
12 L 100	12	6F	ACERO	36,38	35,62	43	24	31,8	45	8
13 L 100	13	6F	ACERO	39,41	38,65	44	28	31,8	45	8
14 L 100	14	6F	ACERO	42,45	41,68	48	28	31,8	45	11
15 L 100	15	6F	ACERO	45,48	44,72	51	34	31,8	45	11
16 L 100	16	6F	ACERO	48,51	47,75	54	36	31,8	45	11
17 L 100	17	6F	ACERO	51,54	50,78	57	36	31,8	45	11
18 L 100	18	6F	ACERO	54,57	53,81	60	40	31,8	45	11
19 L 100	19	6F	ACERO	57,61	56,84	64	40	31,8	45	11
20 L 100	20	6F	ACERO	60,64	59,88	66	40	31,8	45	11
21 L 100	21	6F	ACERO	63,67	62,91	70	45	31,8	45	11
22 L 100	22	6F	ACERO	66,70	65,94	75	45	31,8	45	11
23 L 100	23	6F	ACERO	69,73	68,97	79	55	31,8	45	11
24 L 100	24	6F	ACERO	72,77	72,00	79	55	31,8	45	11
25 L 100	25	6F	ACERO	75,80	75,04	83	58	31,8	45	11
26 L 100	26	6F	ACERO	78,83	78,07	87	58	31,8	45	11
27 L 100	27	6F	ACERO	81,86	81,10	87	58	31,8	45	11
28 L 100	28	6F	ACERO	84,89	84,13	91	58	31,8	45	11
29 L 100	29	6F	ACERO	87,93	87,16	93	58	31,8	45	11
30 L 100	30	6F	ACERO	90,96	90,20	97	70	31,8	45	11
32 L 100	32	6F	ACERO	97,02	96,26	102	70	31,8	45	11
33 L 100	33	6F	ACERO	100,05	99,29	106	70	31,8	45	11
34 L 100	34	6F	ACERO	103,08	102,32	112	70	31,8	45	11
35 L 100	35	6F	ACERO	106,12	105,35	112	70	31,8	45	11
36 L 100	36	6F	ACERO	109,15	108,39	115	70	31,8	45	11
40 L 100	40	6WF	ACERO	121,28	120,51	128	70	31,8	45	11
41 L 100	41	6WF	ACERO	124,31	123,55	135	70	31,8	45	11
42 L 100	42	6WF	ACERO	127,34	126,58	135	70	31,8	45	11
44 L 100	44	6WF	ACERO	133,40	132,64	142	70	31,8	45	11
45 L 100	45	6WF	ACERO	136,44	135,67	142	70	31,8	45	11
47 L 100	47	6WF	ACERO	142,50	141,74	150	70	31,8	45	11
48 L 100	48	6WF	ACERO	145,53	144,77	150	70	31,8	45	11
49 L 100	49	6W	F.GRIS	148,56	147,80	-	70	31,8	45	14
50 L 100	50	6W	F.GRIS	151,60	150,83	-	70	31,8	45	14
52 L 100	52	6W	F.GRIS	157,66	156,90	-	70	31,8	45	14
56 L 100	56	6W	F.GRIS	169,79	169,02	-	70	31,8	45	14
57 L 100	57	6W	F.GRIS	172,82	172,06	-	70	31,8	45	14
60 L 100	60	6W	F.GRIS	181,91	181,15	-	75	31,8	50	14
65 L 100	65	6A	F.GRIS	196,31	196,31	-	75	31,8	50	14
66 L 100	66	6A	F.GRIS	199,34	199,34	-	75	31,8	50	14
72 L 100	72	6A	F.GRIS	218,30	217,53	-	75	31,8	50	14
84 L 100	84	6A	F.GRIS	254,68	253,92	-	75	31,8	50	14
90 L 100	90	6A	F.GRIS	272,87	272,11	-	75	31,8	50	14
96 L 100	96	6A	F.GRIS	291,06	290,30	-	75	31,8	50	14
120 L 100	120	6A	F.GRIS	363,83	363,07	-	75	31,8	50	14




TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO H – PASO 12,7 MM PARA CORREA ANCHO 100 (25,4 MM)


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
14 H 100	14	6F	ACERO	56,60	55,22	64	40	27	45	11
15 H 100	15	6F	ACERO	60,64	59,27	66,5	45	27	45	11
16 H 100	16	6F	ACERO	64,68	63,31	70	45	27	45	11
17 H 100	17	6F	ACERO	68,72	67,35	75	45	27	45	11
18 H 100	18	6F	ACERO	72,77	71,39	79	55	27	45	14
19 H 100	19	6F	ACERO	76,81	75,44	82,5	60	27	45	14
20 H 100	20	6F	ACERO	80,85	79,48	87	62	27	45	14
21 H 100	21	6F	ACERO	84,89	83,52	91	65	27	45	14
22 H 100	22	6F	ACERO	88,94	87,56	94	68	27	45	14
23 H 100	23	6F	ACERO	92,98	91,61	97	72	27	45	14
24 H 100	24	6F	ACERO	97,02	95,65	102	72	27	45	14
25 H 100	25	6F	ACERO	101,06	99,69	106	72	27	45	14
26 H 100	26	6F	ACERO	105,11	103,73	112	80	27	45	14
27 H 100	27	6F	ACERO	109,15	107,78	115	80	27	45	14
28 H 100	28	6F	ACERO	113,19	111,82	120	80	27	45	14
29 H 100	29	6F	ACERO	117,23	115,86	120	80	27	45	14
30 H 100	30	6F	ACERO	121,28	119,90	128	80	27	45	14
32 H 100	32	6F	ACERO	129,36	127,99	135	80	27	45	14
33 H 100	33	6F	ACERO	133,40	132,03	142	80	27	45	14
34 H 100	34	6F	ACERO	137,45	136,07	142	80	27	45	14
35 H 100	35	6F	ACERO	141,49	140,12	150	80	27	45	14
36 H 100	36	6WF	ACERO	145,53	144,16	150	80	27	45	14
38 H 100	38	6WF	ACERO	153,62	152,24	158	80	27	45	14
40 H 100	40	6WF	ACERO	161,70	160,33	168	80	27	45	14
42 H 100	42	6WF	ACERO	169,79	168,41	180	80	27	45	19
44 H 100	44	6WF	F.GRIS	177,87	176,50	184	80	27	45	19
45 H 100	45	6WF	F.GRIS	181,91	180,54	192	80	27	45	19
48 H 100	48	6WF	F.GRIS	194,04	192,67	200	90	27	45	19
49 H 100	49	6W	F.GRIS	198,08	196,71	-	90	27	45	19
50 H 100	50	6W	F.GRIS	202,13	200,75	-	90	27	45	19
52 H 100	52	6W	F.GRIS	210,21	208,84	-	90	27	45	19
58 H 100	58	6A	F.GRIS	234,47	233,09	-	90	27	45	19
60 H 100	60	6A	F.GRIS	242,55	241,18	-	90	27	45	19
70 H 100	70	6A	F.GRIS	282,98	281,61	-	100	27	45	24
72 H 100	72	6A	F.GRIS	291,06	289,69	-	100	27	45	24
82 H 100	82	6A	F.GRIS	331,49	330,12	-	100	27	45	24
84 H 100	84	6A	F.GRIS	339,57	338,20	-	100	27	45	24
94 H 100	94	6A	F.GRIS	380,00	378,63	-	120	27	45	24
96 H 100	96	6A	F.GRIS	388,08	386,71	-	120	27	45	24
106 H 100	106	6A	F.GRIS	428,51	427,14	-	120	27	45	24
116 H 100	116	6A	F.GRIS	468,93	467,56	-	120	27	45	24
118 H 100	118	6A	F.GRIS	477,02	475,65	-	120	27	45	24
120 H 100	120	6A	F.GRIS	485,10	483,73	-	120	27	45	24
150 H 100	150	6A	F.GRIS	606,38	605,01	-	120	27	45	24
152 H 100	152	6A	F.GRIS	614,47	613,09	-	120	27	45	24
154 H 100	154	6A	F.GRIS	622,55	621,18	-	120	27	45	24
156 H 100	156	6A	F.GRIS	630,64	629,26	-	120	27	45	24




TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO H – PASO 12,7 MM PARA CORREA ANCHO 150 (38,1 MM)


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
14 H 150	14	6F	ACERO	56,60	55,22	64	40	46	58	11
15 H 150	15	6F	ACERO	60,64	59,27	66,5	45	46	58	11
16 H 150	16	6F	ACERO	64,68	63,31	70	45	46	58	11
17 H 150	17	6F	ACERO	68,72	67,35	75	45	46	58	11
18 H 150	18	6F	ACERO	72,77	71,39	79	55	46	58	14
19 H 150	19	6F	ACERO	76,81	75,44	82,5	60	46	58	14
20 H 150	20	6F	ACERO	80,85	79,48	87	62	46	58	14
21 H 150	21	6F	ACERO	84,89	83,52	91	65	46	58	14
22 H 150	22	6F	ACERO	88,94	87,56	94	68	46	58	14
23 H 150	23	6F	ACERO	92,98	91,61	97	72	46	58	14
24 H 150	24	6F	ACERO	97,02	95,65	102	72	46	58	14
25 H 150	25	6F	ACERO	101,06	99,69	106	72	46	58	14
26 H 150	26	6F	ACERO	105,11	103,73	112	80	46	58	14
27 H 150	27	6F	ACERO	109,15	107,78	115	80	46	58	14
28 H 150	28	6F	ACERO	113,19	111,82	120	80	46	58	14
29 H 150	29	6F	ACERO	117,23	115,86	120	80	46	58	14
30 H 150	30	6F	ACERO	121,28	119,90	128	80	46	58	14
32 H 150	32	6F	ACERO	129,36	127,99	135	80	46	58	14
33 H 150	33	6F	ACERO	133,40	132,03	142	80	46	58	14
34 H 150	34	6F	ACERO	137,45	136,07	142	80	46	58	14
35 H 150	35	6F	ACERO	141,49	140,12	150	80	46	58	14
36 H 150	36	6WF	ACERO	145,53	144,16	150	80	46	58	14
38 H 150	38	6WF	ACERO	153,62	152,24	158	80	46	58	14
40 H 150	40	6WF	ACERO	161,70	160,33	168	80	46	58	14
42 H 150	42	6WF	ACERO	169,79	168,41	180	80	46	58	19
44 H 150	44	6WF	F.GRIS	177,87	176,50	184	80	46	58	19
45 H 150	45	6WF	F.GRIS	181,91	180,54	192	80	46	58	19
48 H 150	48	6WF	F.GRIS	194,04	192,67	200	90	46	65	19
49 H 150	49	6W	F.GRIS	198,08	196,71	-	90	46	65	19
50 H 150	50	6W	F.GRIS	202,13	200,75	-	90	46	65	19
52 H150	52	6W	F.GRIS	210,21	208,84	-	90	46	65	19
58 H150	58	6A	F.GRIS	234,47	233,09	-	90	46	65	19
60 H150	60	6A	F.GRIS	242,55	241,18	-	90	46	65	19
70 H150	70	6A	F.GRIS	282,98	281,61	-	100	46	65	24
72 H150	72	6A	F.GRIS	291,06	289,69	-	100	46	65	24
82 H150	82	6A	F.GRIS	331,49	330,12	-	100	46	65	24
84 H150	84	6A	F.GRIS	339,57	338,20	-	100	46	65	24
94 H150	94	6A	F.GRIS	380,00	378,63	-	120	46	65	24
96 H150	96	6A	F.GRIS	388,08	386,71	-	120	46	65	24
106 H150	106	6A	F.GRIS	428,51	427,14	-	120	46	65	24
116 H150	116	6A	F.GRIS	468,93	467,56	-	120	46	65	24
118 H150	118	6A	F.GRIS	477,02	475,65	-	120	46	65	24
120 H150	120	6A	F.GRIS	485,10	483,73	-	120	46	65	24
150 H150	150	6A	F.GRIS	606,38	605,01	-	120	46	65	24
152 H150	152	6A	F.GRIS	614,47	613,09	-	120	46	65	24
154 H150	154	6A	F.GRIS	622,55	621,18	-	120	46	65	24
156 H150	156	6A	F.GRIS	630,64	629,26	-	120	46	65	24




TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO H – PASO 12,7 MM PARA CORREA ANCHO 200 (50,8 MM)


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
14 H 200	14	6F	ACERO	56,60	55,22	64	40	58,7	70	11
15 H 200	15	6F	ACERO	60,64	59,27	66,5	45	58,7	70	11
16 H 200	16	6F	ACERO	64,68	63,31	70	45	58,7	70	11
17 H 200	17	6F	ACERO	68,72	67,35	75	45	58,7	70	11
18 H 200	18	6F	ACERO	72,77	71,39	79	55	58,7	70	14
19 H 200	19	6F	ACERO	76,81	75,44	82,5	60	58,7	70	14
20 H 200	20	6F	ACERO	80,85	79,48	87	62	58,7	70	14
21 H 200	21	6F	ACERO	84,89	83,52	91	65	58,7	70	14
22 H 200	22	6F	ACERO	88,94	87,56	94	68	58,7	70	14
23 H 200	23	6F	ACERO	92,98	91,61	97	72	58,7	70	14
24 H 200	24	6F	ACERO	97,02	95,65	102	72	58,7	70	14
25 H 200	25	6F	ACERO	101,06	99,69	106	72	58,7	70	14
26 H 200	26	6F	ACERO	105,11	103,73	112	80	58,7	70	14
27 H 200	27	6F	ACERO	109,15	107,78	115	80	58,7	70	14
28 H 200	28	6F	ACERO	113,19	111,82	120	80	58,7	70	14
29 H 200	29	6F	ACERO	117,23	115,86	120	80	58,7	70	14
30 H 200	30	6F	ACERO	121,28	119,90	128	80	58,7	70	14
32 H 200	32	6F	ACERO	129,36	127,99	135	80	58,7	70	14
33 H 200	33	6F	ACERO	133,40	132,03	142	80	58,7	70	14
34 H 200	34	6F	ACERO	137,45	136,07	142	80	58,7	70	14
35 H 200	35	6F	ACERO	141,49	140,12	150	80	58,7	70	14
36 H 200	36	6WF	ACERO	145,53	144,16	150	80	58,7	70	14
38 H 200	38	6WF	ACERO	153,62	152,24	158	80	58,7	70	14
40 H 200	40	6WF	ACERO	161,70	160,33	168	80	58,7	70	14
42 H 200	42	6WF	ACERO	169,79	168,41	180	80	58,7	70	19
44 H 200	44	6WF	F.GRIS	177,87	176,50	184	80	58,7	70	19
45 H 200	45	6WF	F.GRIS	181,91	180,54	192	80	58,7	70	19
48 H 200	48	6WF	F.GRIS	194,04	192,67	200	90	58,7	75	24
49 H 200	49	6W	F.GRIS	198,08	196,71	-	90	58,7	75	24
50 H 200	50	6W	F.GRIS	202,13	200,75	-	90	58,7	75	24
52 H 200	52	6W	F.GRIS	210,21	208,84	-	90	58,7	75	24
58 H 200	58	6A	F.GRIS	234,47	233,09	-	90	58,7	75	24
60 H 200	60	6A	F.GRIS	242,55	241,18	-	90	58,7	75	24
70 H 200	70	6A	F.GRIS	282,98	281,61	-	100	58,7	75	28
72 H 200	72	6A	F.GRIS	291,06	289,69	-	100	58,7	75	28
82 H 200	82	6A	F.GRIS	331,49	330,12	-	100	58,7	75	28
84 H 200	84	6A	F.GRIS	339,57	338,20	-	100	58,7	75	28
94 H 200	94	6A	F.GRIS	380,00	378,63	-	120	58,7	75	28
96 H 200	96	6A	F.GRIS	388,08	386,71	-	120	58,7	75	28
120 H 200	120	6A	F.GRIS	485,10	483,73	-	120	58,7	75	28
150 H 200	150	6A	F.GRIS	606,38	605,01	-	120	58,7	75	28
152 H 200	152	6A	F.GRIS	614,47	613,09	-	120	58,7	75	28
154 H 200	154	6A	F.GRIS	622,55	621,18	-	120	58,7	75	28
156 H 200	156	6A	F.GRIS	630,64	629,26	-	120	58,7	75	28




TRANSMISIONES
GALICIA




TIPO 6F




TIPO 6



TIPO 6W



TIPO 6A




TIPO 6WF

TIPO H – PASO 12,7 MM PARA CORREA ANCHO 300 (76,2 MM)

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
14 H 300	14	6F	ACERO	56,60	55,22	64	40	85,7	100	11
15 H 300	15	6F	ACERO	60,64	59,27	66	45	85,7	100	11
16 H 300	16	6F	ACERO	64,68	63,31	70	45	85,7	100	11
17 H 300	17	6F	ACERO	68,72	67,35	75	45	85,7	100	11
18 H 300	18	6F	ACERO	72,77	71,39	79	55	85,7	100	19
19 H 300	19	6F	ACERO	76,81	75,44	83	60	85,7	100	19
20 H 300	20	6F	ACERO	80,85	79,48	87	62	85,7	100	19
21 H 300	21	6F	ACERO	84,89	83,52	91	65	85,7	100	19
22 H 300	22	6F	ACERO	88,94	87,56	93	68	85,7	100	19
23 H 300	23	6F	ACERO	92,98	91,61	97	72	85,7	100	19
24 H 300	24	6F	ACERO	97,02	95,65	102	72	85,7	100	19
25 H 300	25	6F	ACERO	101,06	99,69	106	72	85,7	100	19
26 H 300	26	6F	ACERO	105,11	103,73	112	80	85,7	100	19
27 H 300	27	6F	ACERO	109,15	107,78	115	80	85,7	100	19
28 H 300	28	6F	ACERO	113,19	111,82	120	80	85,7	100	19
29 H 300	29	6F	ACERO	117,23	115,86	123	80	85,7	100	19
30 H 300	30	6F	ACERO	121,28	119,90	128	80	85,7	100	19
32 H 300	32	6F	ACERO	129,36	127,99	135	80	85,7	100	19
33 H 300	33	6F	ACERO	133,40	132,03	142	80	85,7	100	19
34 H 300	34	6F	ACERO	137,45	136,07	142	80	85,7	100	19
35 H 300	35	6F	ACERO	141,49	140,12	150	80	85,7	100	19
36 H 300	36	6WF	ACERO	145,53	144,16	150	80	85,7	100	19
38 H 300	38	6WF	ACERO	153,62	152,24	158	80	85,7	100	19
40 H 300	40	6WF	ACERO	161,70	160,33	168	80	85,7	100	19
42 H 300	42	6WF	ACERO	169,79	168,41	175	80	85,7	100	24
44 H 300	44	6WF	F.GRIS	177,87	176,50	184	80	85,7	100	24
45 H 300	45	6WF	F.GRIS	181,91	180,54	192	80	85,7	100	24
48 H 300	48	6WF	F.GRIS	194,04	192,67	200	90	85,7	100	24
49 H 300	49	6W	F.GRIS	198,08	196,71	-	90	85,7	100	24
50 H 300	50	6W	F.GRIS	202,13	200,75	-	90	85,7	100	24
52 H300	52	6W	F.GRIS	210,21	208,84	-	90	85,7	100	24
58 H300	58	6A	F.GRIS	234,47	233,09	-	90	85,7	100	24
60 H300	60	6A	F.GRIS	242,55	241,18	-	90	85,7	100	28
70 H300	70	6A	F.GRIS	282,98	281,61	-	100	85,7	100	28
72 H300	72	6A	F.GRIS	291,06	289,69	-	100	85,7	100	28
82 H300	82	6A	F.GRIS	331,49	330,12	-	100	85,7	100	28
84 H300	84	6A	F.GRIS	339,57	338,20	-	100	85,7	100	28
94 H300	94	6A	F.GRIS	380,00	378,63	-	120	85,7	100	28
96 H300	96	6A	F.GRIS	388,08	386,71	-	120	85,7	100	28
120 H300	120	6A	F.GRIS	485,10	483,73	-	120	85,7	100	28
150 H300	150	6A	F.GRIS	606,38	605,01	-	120	85,7	100	28
152 H300	152	6A	F.GRIS	614,47	613,09	-	120	85,7	100	28
154 H300	154	6A	F.GRIS	622,55	621,18	-	120	85,7	100	28
156 H300	156	6A	F.GRIS	630,64	629,26	-	120	85,7	100	28



TRANSMISIONES
GALICIA

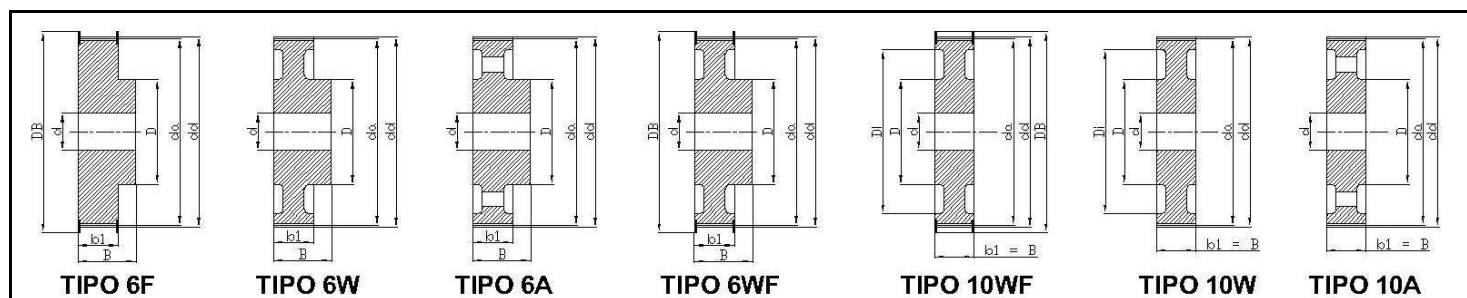

TIPO HTD 5M – PASO 5 MM PARA CORREA ANCHO 9 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
12-5M-09	12	6F	ACERO	19,10	17,96	23	12	14,5	20	
14-5M-09	14	6F	ACERO	22,28	21,14	25	13	14,5	20	
15-5M-09	15	6F	ACERO	23,87	22,73	28	16	14,5	20	
16-5M-09	16	6F	ACERO	25,46	24,32	28	16,2	14,5	20	
18-5M-09	18	6F	ACERO	28,65	27,51	32	20	14,5	20	
20-5M-09	20	6F	ACERO	31,83	30,69	36	23	14,5	22,5	
21-5M-09	21	6F	ACERO	33,42	32,28	38	24	14,5	22,5	
22-5M-09	22	6F	ACERO	35,01	33,87	39	25,5	14,5	22,5	
24-5M-09	24	6F	ACERO	38,20	37,06	42	27	14,5	22,5	
26-5M-09	26	6F	ACERO	41,38	40,24	44	30	14,5	22,5	
28-5M-09	28	6F	ACERO	44,56	43,42	48	30,5	14,5	22,5	
30-5M-09	30	6F	ACERO	47,75	46,60	51	35	14,5	22,5	
32-5M-09	32	6F	ACERO	50,93	49,79	54	38	14,5	22,5	8
36-5M-09	36	6F	ACERO	57,30	56,16	60	38	14,5	22,5	8
40-5M-09	40	6F	ACERO	63,66	62,52	71	38	14,5	22,5	8
44-5M-09	44	6W	ALUMINIO	70,03	68,89		38	14,5	25,5	8
48-5M-09	48	6W	ALUMINIO	76,39	75,25		45	14,5	25,5	8
60-5M-09	60	6W	ALUMINIO	95,49	94,35		45	14,5	25,5	8
72-5M-09	72	6W	ALUMINIO	114,59	113,45		45	14,5	25,5	8

TIPO HTD 5M – PASO 5 MM PARA CORREA ANCHO 15 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
12-5M-15	12	6F	ACERO	19,10	17,96	23	12	20,5	26	
14-5M-15	14	6F	ACERO	22,28	21,14	25	13	20,5	26	
15-5M-15	15	6F	ACERO	23,87	22,73	28	16	20,5	26	
16-5M-15	16	6F	ACERO	25,46	24,32	28	16,2	20,5	26	
18-5M-15	18	6F	ACERO	28,65	27,51	32	20	20,5	26	
20-5M-15	20	6F	ACERO	31,83	30,69	36	23	20,5	26	
21-5M-15	21	6F	ACERO	33,42	32,28	38	24	20,5	26	
22-5M-15	22	6F	ACERO	35,01	33,87	39	25,5	20,5	26	
24-5M-15	24	6F	ACERO	38,20	37,06	42	27	20,5	28	
26-5M-15	26	6F	ACERO	41,38	40,24	44	30	20,5	28	
28-5M-15	28	6F	ACERO	44,56	43,42	48	30,5	20,5	28	
30-5M-15	30	6F	ACERO	47,75	46,60	51	35	20,5	28	
32-5M-15	32	6F	ACERO	50,93	49,79	54	38	20,5	28	8
36-5M-15	36	6F	ACERO	57,30	56,16	60	38	20,5	28	8
40-5M-15	40	6F	ACERO	63,66	62,52	71	38	20,5	28	8
44-5M-15	44	6W	ALUMINIO	70,03	68,89		38	20,5	30	8
48-5M-15	48	6W	ALUMINIO	76,39	75,25		45	20,5	30	8
60-5M-15	60	6W	ALUMINIO	95,49	94,35		45	20,5	30	8
72-5M-15	72	6W	ALUMINIO	114,59	113,45		45	20,5	30	8



TRANSMISIONES GALICIA

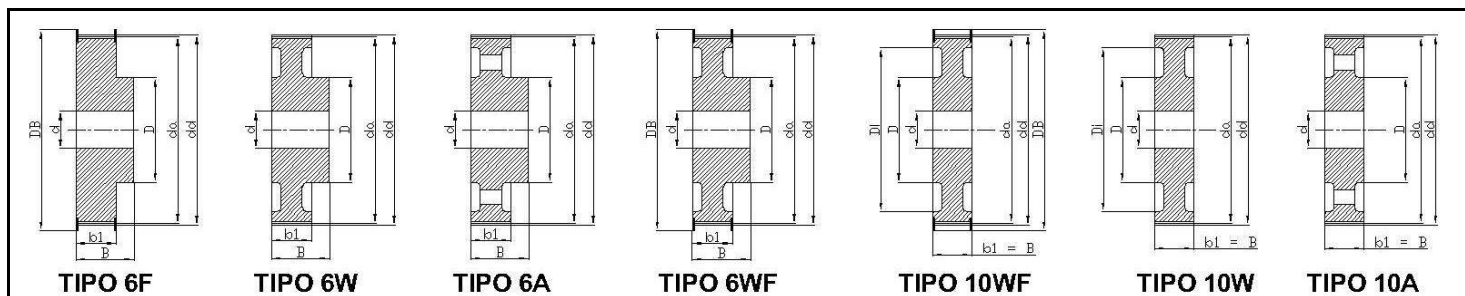

TIPO HTD 5M – PASO 5 MM PARA CORREA ANCHO 25 MM


POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
12-5M-25	12	6F	ACERO	19,10	17,96	23	12	30,5	36	
14-5M-25	14	6F	ACERO	22,28	21,14	25	13	30,5	36	
15-5M-25	15	6F	ACERO	23,87	22,73	28	16	30,5	36	
16-5M-25	16	6F	ACERO	25,46	24,32	28	16,5	30,5	36	
18-5M-25	18	6F	ACERO	28,65	27,51	32	20	30,5	36	
20-5M-25	20	6F	ACERO	31,83	30,69	36	23	30,5	36	
21-5M-25	21	6F	ACERO	33,42	32,28	38	24	30,5	38,5	
22-5M-25	22	6F	ACERO	35,01	33,87	39	25,5	30,5	38,5	
24-5M-25	24	6F	ACERO	38,20	37,06	42	27	30,5	38,5	
26-5M-25	26	6F	ACERO	41,38	40,24	44	30	30,5	38,5	
28-5M-25	28	6F	ACERO	44,56	43,42	48	30,5	30,5	38,5	
30-5M-25	30	6F	ACERO	47,75	46,60	51	35	30,5	38,5	
32-5M-25	32	6F	ACERO	50,93	49,79	54	38	30,5	38,5	8
36-5M-25	36	6F	ACERO	57,30	56,16	60	38	30,5	38,5	8
40-5M-25	40	6F	ACERO	63,66	62,52	71	38	30,5	38,5	8
44-5M-25	44	6W	ALUMINIO	70,03	68,89		38	30,5	40,5	8
48-5M-25	48	6W	ALUMINIO	76,39	75,25		45	30,5	40,5	8
60-5M-25	60	6W	ALUMINIO	95,49	94,35		45	30,5	40,5	8
72-5M-25	72	6W	ALUMINIO	114,59	113,45		45	30,5	40,5	8

TIPO HTD 8M – PASO 8 MM PARA CORREA ANCHO 20 MM

POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
22-8M-20	22	6F	ACERO	56,02	54,65	60	43	28	38	12
24-8M-20	24	6F	ACERO	61,12	59,75	66	45	28	38	12
26-8M-20	26	6F	ACERO	66,21	64,84	70	48	28	38	12
28-8M-20	28	6F	ACERO	71,30	70,08	75	50	28	38	15
30-8M-20	30	6F	ACERO	76,39	75,13	83	55	28	38	15
32-8M-20	32	6F	ACERO	81,49	80,16	87	60	28	38	15
34-8M-20	34	6F	ACERO	86,58	85,22	91	70	28	38	15
36-8M-20	36	6F	ACERO	91,67	90,30	97	75	28	38	15
38-8M-20	38	6F	ACERO	96,77	95,39	102	75	28	38	15
40-8M-20	40	6F	ACERO	101,86	100,49	106	75	28	38	15
44-8M-20	44	6F	ACERO	112,05	110,67	120	75	28	38	15
48-8M-20	48	6F	ACERO	122,23	120,86	128	75	28	38	15
56-8M-20	56	6WF	ACERO	142,60	141,23	150	80	28	38	15
64-8M-20	64	6WF	ACERO	162,97	161,60	168	80	28	38	15
72-8M-20	72	6WF	ACERO	183,35	181,97	192	80	28	38	15
80-8M-20	80	6W	F.GRIS	203,72	202,35		90	28	38	15
90-8M-20	90	6A	F.GRIS	229,18	227,81		90	28	38	15
112-8M-20	112	6A	F.GRIS	285,21	283,83		90	28	38	18
144-8M-20	144	6A	F.GRIS	366,69	365,32		90	28	38	20
168-8M-20	168	6A	F.GRIS	427,81	426,44		100	28	38	20
192-8M-20	192	6A	F.GRIS	488,92	487,55		100	28	38	20



TRANSMISIONES
GALICIA

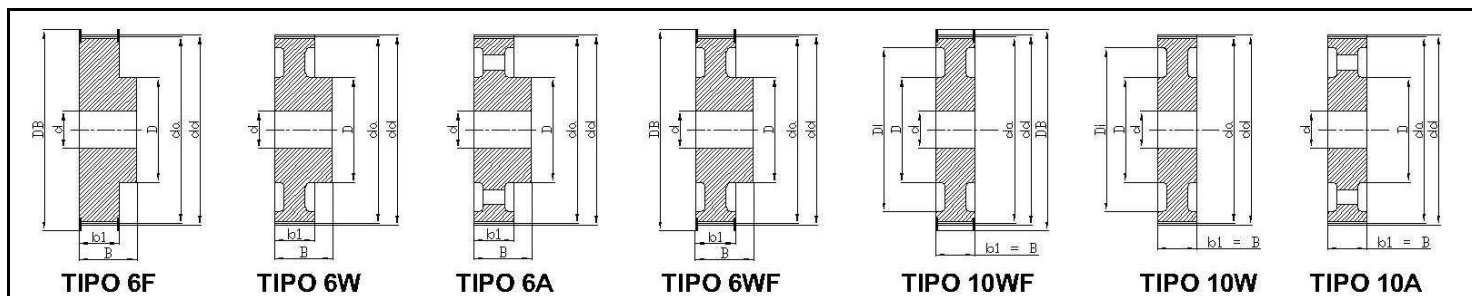

TIPO HTD 8M – PASO 8 MM PARA CORREA ANCHO 30 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
22-8M-30	22	6F	ACERO	56,02	54,65	60	43		38	48	12
24-8M-30	24	6F	ACERO	61,12	59,75	66	45		38	48	12
26-8M-30	26	6F	ACERO	66,21	64,84	70	48		38	48	12
28-8M-30	28	6F	ACERO	71,30	70,08	75	50		38	48	15
30-8M-30	30	6F	ACERO	76,39	75,13	83	55		38	48	15
32-8M-30	32	6F	ACERO	81,49	80,16	87	60		38	48	15
34-8M-30	34	6F	ACERO	86,58	85,22	91	70		38	48	15
36-8M-30	36	6F	ACERO	91,67	90,30	97	75		38	48	15
38-8M-30	38	6F	ACERO	96,77	95,39	102	75		38	48	15
40-8M-30	40	6F	ACERO	101,86	100,49	106	75		38	48	15
44-8M-30	44	6F	ACERO	112,05	110,67	120	75		38	48	15
48-8M-30	48	6F	ACERO	122,23	120,86	128	75		38	48	15
56-8M-30	56	6WF	ACERO	142,60	141,23	150	90	116	38	48	15
64-8M-30	64	6WF	ACERO	162,97	161,60	168	90	137	38	48	15
72-8M-30	72	6WF	ACERO	183,35	181,97	192	95	158	38	48	15
80-8M-30	80	6W	F.GRIS	203,72	202,35		100	180	38	48	15
90-8M-30	90	6A	F.GRIS	229,18	227,81		100	204	38	48	15
112-8M-30	112	6A	F.GRIS	285,21	283,83		100	254	38	48	18
144-8M-30	144	6A	F.GRIS	366,69	365,32		100	336	38	48	20
168-8M-30	168	6A	F.GRIS	427,81	426,44		100	400	38	48	20
192-8M-30	192	6A	F.GRIS	488,92	487,55		100	460	38	48	20

TIPO HTD 8M – PASO 8 MM PARA CORREA ANCHO 50 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
22-8M-50	22	6F	ACERO	56,02	54,65	60	43		60	70	12
24-8M-50	24	6F	ACERO	61,12	59,75	66	45		60	70	12
26-8M-50	26	6F	ACERO	66,21	64,84	70	48		60	70	15
28-8M-50	28	6F	ACERO	71,30	70,08	75	50		60	70	15
30-8M-50	30	6F	ACERO	76,39	75,13	83	55		60	70	15
32-8M-50	32	6F	ACERO	81,49	80,16	87	60		60	70	15
34-8M-50	34	6F	ACERO	86,58	85,22	91	70		60	70	15
36-8M-50	36	6F	ACERO	91,67	90,30	97	75		60	70	15
38-8M-50	38	6F	ACERO	96,77	95,39	102	75		60	70	15
40-8M-50	40	6F	ACERO	101,86	100,49	106	75		60	70	18
44-8M-50	44	6F	ACERO	112,05	110,67	120	75		60	70	18
48-8M-50	48	6F	ACERO	122,23	120,86	128	75		60	70	18
56-8M-50	56	10WF	ACERO	142,60	141,23	150	80	116	60	60	18
64-8M-50	64	10WF	ACERO	162,97	161,60	168	80	137	60	60	18
72-8M-50	72	10WF	ACERO	183,35	181,97	192	80	158	60	60	18
80-8M-50	80	10W	F.GRIS	203,72	202,35		110	180	60	60	18
90-8M-50	90	10A	F.GRIS	229,18	227,81		110	204	60	60	18
112-8M-50	112	10A	F.GRIS	285,21	283,83		110	254	60	60	18
144-8M-50	144	10A	F.GRIS	366,69	365,32		110	336	60	60	20
168-8M-50	168	10A	F.GRIS	427,81	426,44		120	400	60	60	20
192-8M-50	192	10A	F.GRIS	488,92	487,55		130	460	60	60	20



TRANSMISIONES
GALICIA

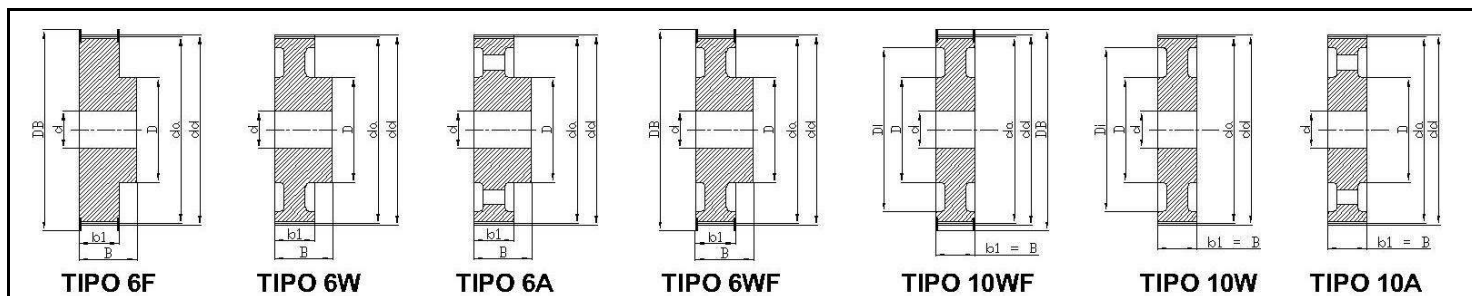

TIPO HTD 8M – PASO 8 MM PARA CORREA ANCHO 85 MM


POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	D_i (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
22-8M-85	22	6F	ACERO	56,02	54,65	60	43		95	105	12
24-8M-85	24	6F	ACERO	61,12	59,75	66	45		95	105	12
26-8M-85	26	6F	ACERO	66,21	64,84	70	48		95	105	12
28-8M-85	28	6F	ACERO	71,30	70,08	75	50		95	105	15
30-8M-85	30	6F	ACERO	76,39	75,13	83	55		95	105	15
32-8M-85	32	6F	ACERO	81,49	80,16	87	60		95	105	15
34-8M-85	34	6F	ACERO	86,58	85,22	91	66		95	105	15
36-8M-85	36	6F	ACERO	91,67	90,30	97	70		95	105	15
38-8M-85	38	6F	ACERO	96,77	95,39	102	75		95	105	15
40-8M-85	40	6F	ACERO	101,86	100,49	106	75		95	105	18
44-8M-85	44	6F	ACERO	112,05	110,67	120	75		95	105	18
48-8M-85	48	6F	ACERO	122,23	120,86	128	80		95	105	18
56-8M-85	56	6F	ACERO	142,60	141,23	150	90		95	105	18
64-8M-85	64	10WF	ACERO	162,97	161,60	168	100	137	95	95	20
72-8M-85	72	10WF	ACERO	183,35	181,97	192	100	158	95	95	20
80-8M-85	80	10W	F.GRIS	203,72	202,35		110	180	95	95	20
90-8M-85	90	10A	F.GRIS	229,18	227,81		110	204	95	95	20
112-8M-85	112	10A	F.GRIS	285,21	283,83		110	254	95	95	24
144-8M-85	144	10A	F.GRIS	366,69	365,32		110	336	95	95	24
168-8M-85	168	10A	F.GRIS	427,81	426,44		120	400	95	95	24
192-8M-85	192	10A	F.GRIS	488,92	487,55		130	460	95	95	24

TIPO HTD 14M – PASO 14 MM PARA CORREA ANCHO 40 MM

POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	D_i (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
28-14M-40	28	6F	ACERO	124,78	122,12	128	100		54	69	24
29-14M-40	29	6F	ACERO	129,23	126,57	138	100		54	69	24
30-14M-40	30	6F	ACERO	133,69	130,99	138	100		54	69	24
32-14M-40	32	6F	ACERO	142,60	139,88	154	100		54	69	24
34-14M-40	34	6F	ACERO	151,52	148,79	160	100		54	69	24
36-14M-40	36	6F	ACERO	160,43	157,68	168	100		54	69	24
38-14M-40	38	6F	ACERO	169,34	166,60	183	120		54	69	24
40-14M-40	40	6F	ACERO	178,25	175,49	188	120		54	69	24
44-14M-40	44	6F	ACERO	196,08	193,28	211	120		54	69	24
48-14M-40	48	6WF	F.GRIS	213,90	211,11	226	135	170	54	69	24
56-14M-40	56	6WF	F.GRIS	249,55	246,76	256	135	207	54	69	28
64-14M-40	64	6WF	F.GRIS	285,21	282,41	296	135	240	54	69	28
72-14M-40	72	6A	F.GRIS	320,86	318,06		135	280	54	69	28
80-14M-40	80	6A	F.GRIS	356,51	353,71		135	314	54	69	28
90-14M-40	90	6A	F.GRIS	401,07	398,28		135	358	54	69	28
112-14M-40	112	6A	F.GRIS	499,11	496,32		135	456	54	69	28
144-14M-40	144	6A	F.GRIS	641,71	638,92		135	600	54	69	28
168-14M-40	168	6A	F.GRIS	748,66	745,87		135	706	54	69	28
192-14M-40	192	6A	F.GRIS	855,62	852,82		135	813	54	69	28
216-14M-40	216	6A	F.GRIS	962,57	959,76		150	920	54	69	28



TRANSMISIONES
GALICIA

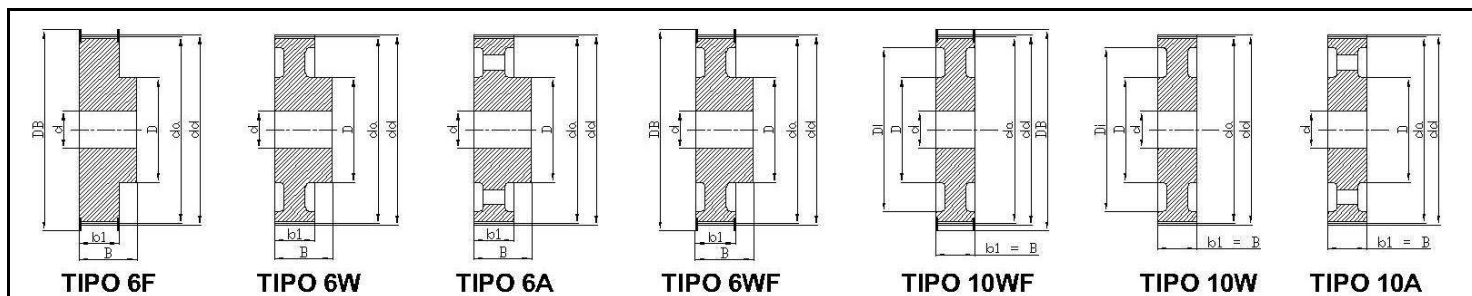


TIPO HTD 14M – PASO 14 MM PARA CORREA ANCHO 55 MM											
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
28-14M-55	28	6F	ACERO	124,78	122,12	128	100		70	85	24
29-14M-55	29	6F	ACERO	129,23	126,57	138	100		70	85	24
30-14M-55	30	6F	ACERO	133,69	130,99	138	100		70	85	24
32-14M-55	32	6F	ACERO	142,60	139,88	154	100		70	85	24
34-14M-55	34	6F	ACERO	151,52	148,79	160	100		70	85	24
36-14M-55	36	6F	ACERO	160,43	157,68	168	100		70	85	24
38-14M-55	38	6F	ACERO	169,34	166,60	183	120		70	85	24
40-14M-55	40	6F	ACERO	178,25	175,49	188	120		70	85	24
44-14M-55	44	6F	ACERO	196,08	193,28	211	120		70	85	24
48-14M-55	48	10WF	F.GRIS	213,90	211,11	226	135	170	70	70	24
56-14M-55	56	10WF	F.GRIS	249,55	246,76	256	135	207	70	70	28
64-14M-55	64	10WF	F.GRIS	285,21	282,41	296	135	240	70	70	28
72-14M-55	72	10A	F.GRIS	320,86	318,06		135	280	70	70	28
80-14M-55	80	10A	F.GRIS	356,51	353,71		135	314	70	70	28
90-14M-55	90	10A	F.GRIS	401,07	398,28		135	358	70	70	28
112-14M-55	112	10A	F.GRIS	499,11	496,32		135	456	70	70	28
144-14M-55	144	10A	F.GRIS	641,71	638,92		135	600	70	70	28
168-14M-55	168	10A	F.GRIS	748,66	745,87		135	706	70	70	28
192-14M-55	192	10A	F.GRIS	855,62	852,82		135	813	70	70	28
216-14M-55	216	10A	F.GRIS	962,57	959,76		150	920	70	70	28

TIPO HTD 14M – PASO 14 MM PARA CORREA ANCHO 85 MM											
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
28-14M-85	28	6F	ACERO	124,78	122,12	128	100		102	117	24
29-14M-85	29	6F	ACERO	129,23	126,57	138	100		102	117	24
30-14M-85	30	6F	ACERO	133,69	130,99	138	100		102	117	24
32-14M-85	32	6F	ACERO	142,60	139,88	154	100		102	117	24
34-14M-85	34	6F	ACERO	151,52	148,79	160	100		102	117	24
36-14M-85	36	6F	ACERO	160,43	157,68	168	100		102	117	32
38-14M-85	38	6F	ACERO	169,34	166,60	183	120		102	117	32
40-14M-85	40	6F	ACERO	178,25	175,49	188	135		102	117	32
44-14M-85	44	6F	ACERO	196,08	193,28	211	135		102	117	32
48-14M-85	48	6F	ACERO	213,90	211,11	226	150		102	117	32
56-14M-85	56	10WF	F.GRIS	249,55	246,76	256	150	207	102	117	32
64-14M-85	64	10WF	F.GRIS	285,21	282,41	296	150	240	102	102	32
72-14M-85	72	10A	F.GRIS	320,86	318,06		150	278	102	102	32
80-14M-85	80	10A	F.GRIS	356,51	353,71		150	314	102	102	32
90-14M-85	90	10A	F.GRIS	401,07	398,28		150	358	102	102	32
112-14M-85	112	10A	F.GRIS	499,11	496,32		150	456	102	102	32
144-14M-85	144	10A	F.GRIS	641,71	638,92		150	600	102	102	32
168-14M-85	168	10A	F.GRIS	748,66	745,87		150	706	102	102	32
192-14M-85	192	10A	F.GRIS	855,62	852,82		165	813	102	102	32
216-14M-85	216	10A	F.GRIS	962,57	959,76		160	920	102		



TRANSMISIONES
GALICIA

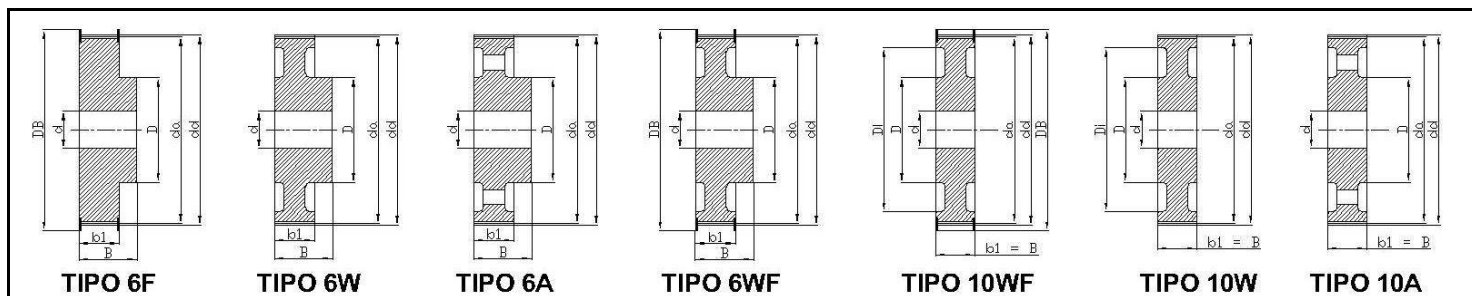


TIPO HTD 14M – PASO 14 MM PARA CORREA ANCHO 115 MM											
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
28-14M-115	28	6F	ACERO	124,78	122,12	128	100		133	148	32
29-14M-115	29	6F	ACERO	129,23	126,57	138	100		133	148	32
30-14M-115	30	6F	ACERO	133,69	130,99	138	100		133	148	32
32-14M-115	32	6F	ACERO	142,60	139,88	154	100		133	148	32
34-14M-115	34	6F	ACERO	151,52	148,79	160	100		133	148	32
36-14M-115	36	6F	ACERO	160,43	157,68	168	100		133	148	32
38-14M-115	38	6F	ACERO	169,34	166,60	183	120		133	148	32
40-14M-115	40	6F	ACERO	178,25	175,49	188	135		133	148	32
44-14M-115	44	6F	ACERO	196,08	193,28	211	140		133	148	32
48-14M-115	48	6F	ACERO	213,90	211,11	226	150		133	148	32
56-14M-115	56	6F	ACERO	249,55	246,76	256	150		133	148	32
64-14M-115	64	10WF	F.GRIS	285,21	282,41	296	150	240	133	133	32
72-14M-115	72	10A	F.GRIS	320,86	318,06		150	278	133	133	32
80-14M-115	80	10A	F.GRIS	356,51	353,71		150	314	133	133	32
90-14M-115	90	10A	F.GRIS	401,07	398,28		150	358	133	133	32
112-14M-115	112	10A	F.GRIS	499,11	496,32		150	456	133	133	32
144-14M-115	144	10A	F.GRIS	641,71	638,92		165	600	133	133	32
168-14M-115	168	10A	F.GRIS	748,66	745,87		165	706	133	133	32
192-14M-115	192	10A	F.GRIS	855,62	852,82		165	813	133	133	32
216-14M-115	216	10A	F.GRIS	962,57	959,76		165	920	133		32

TIPO HTD 14M – PASO 14 MM PARA CORREA ANCHO 170 MM											
POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	D _i (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
28-14M-170	28	6F	ACERO	124,78	122,12	128	100		187	202	32
29-14M-170	29	6F	ACERO	129,23	126,57	138	100		187	202	32
30-14M-170	30	6F	ACERO	133,69	130,99	138	100		187	202	32
32-14M-170	32	6F	ACERO	142,60	139,88	154	100		187	202	32
34-14M-170	34	6F	ACERO	151,52	148,79	160	100		187	202	32
36-14M-170	36	6F	ACERO	160,43	157,68	168	100		187	202	32
38-14M-170	38	6F	ACERO	169,34	166,60	183	120		187	202	32
40-14M-170	40	6F	ACERO	178,25	175,49	188	135		187	202	32
44-14M-170	44	6F	ACERO	196,08	193,28	211	140		187	202	32
48-14M-170	48	6F	F.GRIS	213,90	211,11	226	150		187	202	32
56-14M-170	56	6F	F.GRIS	249,55	246,76	256	150		187	202	32
64-14M-170	64	10WF	F.GRIS	285,21	282,41	296	150	240	187	187	32
72-14M-170	72	10A	F.GRIS	320,86	318,06		150	278	187	187	32
80-14M-170	80	10A	F.GRIS	356,51	353,71		150	314	187	187	32
90-14M-170	90	10A	F.GRIS	401,07	398,28		150	358	187	187	32
112-14M-170	112	10A	F.GRIS	499,11	496,32		150	456	187	187	32
144-14M-170	144	10A	F.GRIS	641,71	638,92		165	600	187	187	32
168-14M-170	168	10A	F.GRIS	748,66	745,87		165	706	187	187	32
192-14M-170	192	10A	F.GRIS	855,62	852,82		165	813	187	187	32
216-14M-170	216	10A	F.GRIS	962,57	959,76		165	920	187	187	32



TRANSMISIONES
GALICIA

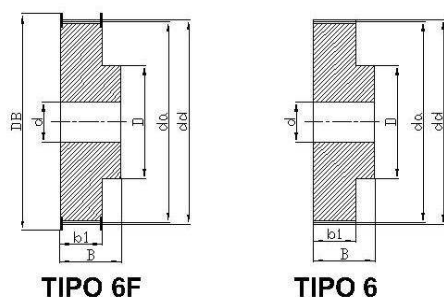

TIPO 6F


TIPO 6

TIPO 21 T5 – PASO 5 MM PARA CORREA ANCHO 10 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
21 T5 / 10	10	6F	ALUMINIO	16,05	15,05	19,5	8	15	21	
21 T5 / 12	12	6F	ALUMINIO	19,25	18,25	23	11	15	21	
21 T5 / 14	14	6F	ALUMINIO	22,45	21,45	25	13	15	21	
21 T5 / 15	15	6F	ALUMINIO	24,05	23,05	28	16	15	21	
21 T5 / 16	16	6F	ALUMINIO	25,06	24,60	32	18	15	21	
21 T5 / 18	18	6F	ALUMINIO	28,80	27,80	32	10	15	21	
21 T5 / 19	19	6F	ALUMINIO	30,40	29,40	36	20	15	21	
21 T5 / 20	20	6F	ALUMINIO	32,00	31,00	36	22	15	21	
21 T5 / 22	22	6F	ALUMINIO	32,15	34,15	38	23	15	21	
21 T5 / 24	24	6F	ALUMINIO	38,40	37,40	42	24	15	21	
21 T5 / 25	25	6F	ALUMINIO	39,95	38,95	44	26	15	21	
21 T5 / 26	26	6F	ALUMINIO	41,60	40,60	44	26	15	21	
21 T5 / 27	27	6F	ALUMINIO	43,20	42,20	48	30	15	21	8
21 T5 / 28	28	6F	ALUMINIO	44,75	43,75	48	32	15	21	8
21 T5 / 30	30	6F	ALUMINIO	47,95	46,95	51	34	15	21	8
21 T5 / 32	32	6F	ALUMINIO	51,10	50,10	54	38	15	21	8
21 T5 / 36	36	6F	ALUMINIO	57,45	56,45	64	38	15	21	8
21 T5 / 40	40	6F	ALUMINIO	63,85	62,85	66,5	40	15	21	8
21 T5 / 42	42	6F	ALUMINIO	67,00	66,00	70	40	15	21	8
21 T5 / 44	44	6	ALUMINIO	70,20	69,20		45	15	21	8
21 T5 / 48	48	6	ALUMINIO	76,55	75,55		50	15	21	8
21 T5 / 60	60	6	ALUMINIO	95,65	94,65		65	15	21	8

TIPO 27 T5 – PASO 5 MM PARA CORREA ANCHO 16 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
27 T5 / 10	10	6F	ALUMINIO	16,05	15,05	19,5	8	21	27	
27 T5 / 12	12	6F	ALUMINIO	19,25	18,25	23	11	21	27	
27 T5 / 14	14	6F	ALUMINIO	22,45	21,45	25	13	21	27	
27 T5 / 15	15	6F	ALUMINIO	24,05	23,05	28	16	21	27	
27 T5 / 16	16	6F	ALUMINIO	25,06	24,60	32	18	21	27	
27 T5 / 18	18	6F	ALUMINIO	28,80	27,80	32	10	21	27	
27 T5 / 19	19	6F	ALUMINIO	30,40	29,40	36	20	21	27	
27 T5 / 20	20	6F	ALUMINIO	32,00	31,00	36	22	21	27	
27 T5 / 22	22	6F	ALUMINIO	32,15	34,15	38	23	21	27	
27 T5 / 24	24	6F	ALUMINIO	38,40	37,40	42	24	21	27	
27 T5 / 25	25	6F	ALUMINIO	39,95	38,95	44	26	21	27	
27 T5 / 26	26	6F	ALUMINIO	41,60	40,60	44	26	21	27	
27 T5 / 27	27	6F	ALUMINIO	43,20	42,20	48	30	21	27	8
27 T5 / 28	28	6F	ALUMINIO	44,75	43,75	48	32	21	27	8
27 T5 / 30	30	6F	ALUMINIO	47,95	46,95	51	34	21	27	8
27 T5 / 32	32	6F	ALUMINIO	51,10	50,10	54	38	21	27	8
27 T5 / 36	36	6F	ALUMINIO	57,45	56,45	64	38	21	27	8
27 T5 / 40	40	6F	ALUMINIO	63,85	62,85	66,5	40	21	27	8
27 T5 / 42	42	6F	ALUMINIO	67,00	66,00	70	40	21	27	8
27 T5 / 44	44	6	ALUMINIO	70,20	69,20		45	21	27	8
27 T5 / 48	48	6	ALUMINIO	76,55	75,55		50	21	27	8
27 T5 / 60	60	6	ALUMINIO	95,65	94,65		65	21	27	8

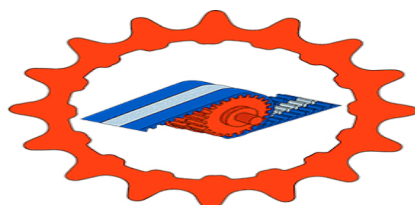

TRANSMISIONES
GALICIA

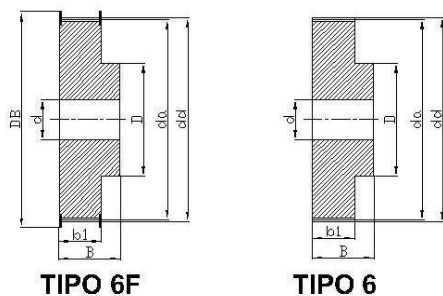

TIPO 6F

TIPO 6

TIPO 36 T5 – PASO 5 MM PARA CORREA ANCHO 25 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
36 T5 / 10	10	6F	ALUMINIO	16,05	15,05	19,5	8	30	36	
36 T5 / 12	12	6F	ALUMINIO	19,25	18,25	23	11	30	36	
36 T5 / 14	14	6F	ALUMINIO	22,45	21,45	25	13	30	36	
36 T5 / 15	15	6F	ALUMINIO	24,05	23,05	28	16	30	36	
36 T5 / 16	16	6F	ALUMINIO	25,06	24,60	32	18	30	36	
36 T5 / 18	18	6F	ALUMINIO	28,80	27,80	32	10	30	36	
36 T5 / 19	19	6F	ALUMINIO	30,40	29,40	36	20	30	36	
36 T5 / 20	20	6F	ALUMINIO	32,00	31,00	36	22	30	36	
36 T5 / 22	22	6F	ALUMINIO	32,15	34,15	38	23	30	36	
36 T5 / 24	24	6F	ALUMINIO	38,40	37,40	42	24	30	36	8
36 T5 / 25	25	6F	ALUMINIO	39,95	38,95	44	26	30	36	8
36 T5 / 26	26	6F	ALUMINIO	41,60	40,60	44	26	30	36	8
36 T5 / 27	27	6F	ALUMINIO	43,20	42,20	48	30	30	36	8
36 T5 / 28	28	6F	ALUMINIO	44,75	43,75	48	32	30	36	8
36 T5 / 30	30	6F	ALUMINIO	47,95	46,95	51	34	30	36	8
36 T5 / 32	32	6F	ALUMINIO	51,10	50,10	54	38	30	36	8
36 T5 / 36	36	6F	ALUMINIO	57,45	56,45	64	38	30	36	8
36 T5 / 40	40	6F	ALUMINIO	63,85	62,85	66,5	40	30	36	8
36 T5 / 42	42	6F	ALUMINIO	67,00	66,00	70	40	30	36	8
36 T5 / 44	44	6	ALUMINIO	70,20	69,20		45	30	36	8
36 T5 / 48	48	6	ALUMINIO	76,55	75,55		50	30	36	8
36 T5 / 60	60	6	ALUMINIO	95,65	94,65		65	30	36	8

TIPO 31 T10 – PASO 10 MM PARA CORREA ANCHO 16 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
31 T10 / 12	12	6F	ALUMINIO	38,35	36,35	42	28	21	31	6
31 T10 / 14	14	6F	ALUMINIO	44,70	42,70	48	32	21	31	8
31 T10 / 15	15	6F	ALUMINIO	47,90	45,90	51	32	21	31	8
31 T10 / 16	16	6F	ALUMINIO	51,10	49,10	54	35	21	31	8
31 T10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	21	31	8
31 T10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	21	31	8
31 T10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	21	31	8
31 T10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	21	31	8
31 T10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	21	31	8
31 T10 / 25	25	6F	ALUMINIO	79,75	77,70	83	60	21	31	8
31 T10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	21	31	8
31 T10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	21	31	8
31 T10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	21	31	8
31 T10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	21	31	8
31 T10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	21	31	10
31 T10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	21	31	10
31 T10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	21	31	10
31 T10 / 44	44	6	ALUMINIO	140,20	138,20		88	21	31	10
31 T10 / 48	48	6	ALUMINIO	152,95	150,95		95	21	31	16



TRANSMISIONES
GALICIA

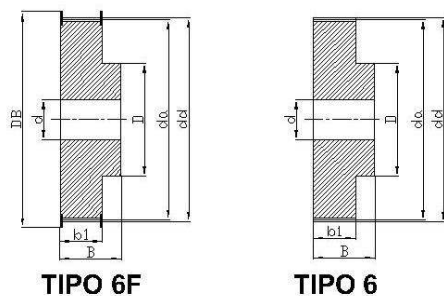

TIPO 6F

TIPO 6

TIPO 40 T10 – PASO 10 MM PARA CORREA ANCHO 25 MM


POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
40 T10 / 12	12	6F	ALUMINIO	38,35	36,35	42	28	30	40	6
40 T10 / 14	14	6F	ALUMINIO	44,70	42,70	48	32	30	40	8
40 T10 / 15	15	6F	ALUMINIO	47,90	45,90	51	32	30	40	8
40 T10 / 16	16	6F	ALUMINIO	51,10	49,10	54	35	30	40	8
40 T10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	30	40	8
40 T10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	30	40	8
40 T10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	30	40	8
40 T10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	30	40	8
40 T10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	30	40	8
40 T10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	30	40	8
40 T10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	30	40	8
40 T10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	30	40	8
40 T10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	30	40	8
40 T10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	30	40	8
40 T10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	30	40	10
40 T10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	30	40	10
40 T10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	30	40	10
40 T10 / 44	44	6	ALUMINIO	140,20	138,20		88	30	40	10
40 T10 / 48	48	6	ALUMINIO	152,95	150,95		95	30	40	16
40 T10 / 60	60	6	ALUMINIO	191,15	189,10		110	30	40	16

TIPO 47 T10 – PASO 10 MM PARA CORREA ANCHO 32 MM

POLEA	Z	MODELO	MATERIAL	d_d (mm)	d_a (mm)	D_B (mm)	D (mm)	b_1 (mm)	B (mm)	d (MPB) (mm)
47 T10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	37	47	10
47 T10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	37	47	10
47 T10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	37	47	12
47 T10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	37	47	12
47 T10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	37	47	12
47 T10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	37	47	12
47 T10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	37	47	12
47 T10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	37	47	12
47 T10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	37	47	12
47 T10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	37	47	12
47 T10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	37	47	12
47 T10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	37	47	16
47 T10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	37	47	16
47 T10 / 44	44	6	ALUMINIO	140,20	138,20		88	37	47	16
47 T10 / 48	48	6	ALUMINIO	152,95	150,95		95	37	47	16
47 T10 / 60	60	6	ALUMINIO	191,15	189,10		110	37	47	16



TRANSMISIONES
GALICIA

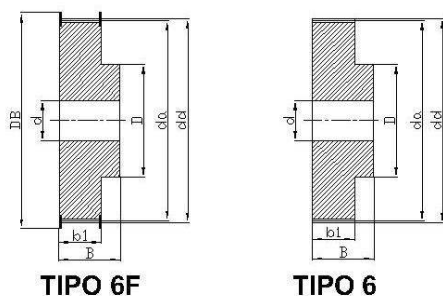

TIPO 6F

TIPO 6

TIPO 66 T10 – PASO 10 MM PARA CORREA ANCHO 50 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
66 T10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	56	66	10
66 T10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	56	66	10
66 T10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	56	66	12
66 T10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	56	66	12
66 T10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	56	66	12
66 T10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	56	66	12
66 T10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	56	66	12
66 T10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	56	66	12
66 T10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	56	66	12
66 T10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	56	66	12
66 T10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	56	66	12
66 T10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	56	66	16
66 T10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	56	66	16
66 T10 / 44	44	6	ALUMINIO	140,20	138,20		88	56	66	16
66 T10 / 48	48	6	ALUMINIO	152,95	150,95		95	56	66	16
66 T10 / 60	60	6	ALUMINIO	191,15	189,10		110	56	66	16

TIPO 21 AT5 – PASO 5 MM PARA CORREA ANCHO 10 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
21 AT5 / 12	12	6F	ALUMINIO	19,25	17,85	23	11	15	21	
21 AT5 / 14	14	6F	ALUMINIO	22,45	21,05	25	13	15	21	
21 AT5 / 15	15	6F	ALUMINIO	24,05	22,65	28	16	15	21	
21 AT5 / 16	16	6F	ALUMINIO	25,06	24,20	32	18	15	21	
21 AT5 / 18	18	6F	ALUMINIO	28,80	27,40	32	10	15	21	
21 AT5 / 19	19	6F	ALUMINIO	30,40	29,00	36	20	15	21	
21 AT5 / 20	20	6F	ALUMINIO	32,00	30,60	36	22	15	21	
21 AT5 / 22	22	6F	ALUMINIO	32,15	33,85	38	23	15	21	
21 AT5 / 24	24	6F	ALUMINIO	38,40	37,00	42	24	15	21	
21 AT5 / 25	25	6F	ALUMINIO	39,95	38,60	44	26	15	21	
21 AT5 / 26	26	6F	ALUMINIO	41,60	40,20	44	26	15	21	
21 AT5 / 27	27	6F	ALUMINIO	43,20	41,80	48	30	15	21	8
21 AT5 / 28	28	6F	ALUMINIO	44,75	43,35	48	32	15	21	8
21 AT5 / 30	30	6F	ALUMINIO	47,95	46,55	51	34	15	21	8
21 AT5 / 32	32	6F	ALUMINIO	51,10	49,70	54	38	15	21	8
21 AT5 / 36	36	6F	ALUMINIO	57,45	56,05	64	38	15	21	8
21 AT5 / 40	40	6F	ALUMINIO	63,85	62,45	66,5	40	15	21	8
21 AT5 / 42	42	6F	ALUMINIO	67,00	65,60	70	40	15	21	8
21 AT5 / 44	44	6	ALUMINIO	70,20	68,80		45	15	21	8
21 AT5 / 48	48	6	ALUMINIO	76,55	75,15		50	15	21	8
21 AT5 / 60	60	6	ALUMINIO	95,65	94,25		65	15	21	8



TRANSMISIONES
GALICIA

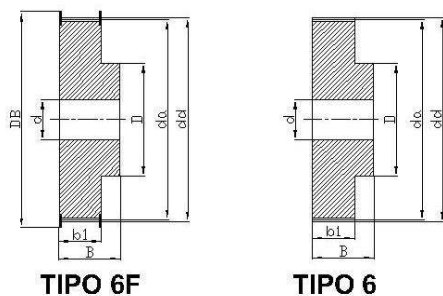

TIPO 6F

TIPO 6

TIPO 27 AT5 – PASO 5 MM PARA CORREA ANCHO 16 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
27 AT5 / 12	12	6F	ALUMINIO	19,25	17,85	23	11	21	27	
27 AT5 / 14	14	6F	ALUMINIO	22,45	21,05	25	13	21	27	
27 AT5 / 15	15	6F	ALUMINIO	24,05	24,20	28	16	21	27	
27 AT5 / 16	16	6F	ALUMINIO	25,06	27,40	32	18	21	27	
27 AT5 / 18	18	6F	ALUMINIO	28,80	29,00	32	10	21	27	
27 AT5 / 19	19	6F	ALUMINIO	30,40	30,60	36	20	21	27	
27 AT5 / 20	20	6F	ALUMINIO	32,00	22,65	36	22	21	27	
27 AT5 / 22	22	6F	ALUMINIO	32,15	33,85	38	23	21	27	
27 AT5 / 24	24	6F	ALUMINIO	38,40	37,00	42	24	21	27	
27 AT5 / 25	25	6F	ALUMINIO	39,95	38,60	44	26	21	27	
27 AT5 / 26	26	6F	ALUMINIO	41,60	40,20	44	26	21	27	
27 AT5 / 27	27	6F	ALUMINIO	43,20	41,80	48	30	21	27	8
27 AT5 / 28	28	6F	ALUMINIO	44,75	43,35	48	32	21	27	8
27 AT5 / 30	30	6F	ALUMINIO	47,95	46,55	51	34	21	27	8
27 AT5 / 32	32	6F	ALUMINIO	51,10	49,70	54	38	21	27	8
27 AT5 / 36	36	6F	ALUMINIO	57,45	56,05	64	38	21	27	8
27 AT5 / 40	40	6F	ALUMINIO	63,85	62,45	66,5	40	21	27	8
27 AT5 / 42	42	6F	ALUMINIO	67,00	65,60	70	40	21	27	8
27 AT5 / 44	44	6	ALUMINIO	70,20	68,80		45	21	27	8
27 AT5 / 48	48	6	ALUMINIO	76,55	75,21		50	21	27	8
27 AT5 / 60	60	6	ALUMINIO	95,65	94,25		65	21	27	8

TIPO 36 AT5 – PASO 5 MM PARA CORREA ANCHO 25 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
36 AT5 / 12	12	6F	ALUMINIO	19,25	17,85	23	11	30	36	
36 AT5 / 14	14	6F	ALUMINIO	22,45	21,05	25	13	30	36	
36 AT5 / 15	15	6F	ALUMINIO	24,05	24,20	28	16	30	36	
36 AT5 / 16	16	6F	ALUMINIO	25,06	27,40	32	18	30	36	
36 AT5 / 18	18	6F	ALUMINIO	28,80	29,00	32	10	30	36	
36 AT5 / 19	19	6F	ALUMINIO	30,40	30,60	36	20	30	36	
36 AT5 / 20	20	6F	ALUMINIO	32,00	22,65	36	22	30	36	
36 AT5 / 22	22	6F	ALUMINIO	32,15	33,85	38	23	30	36	
36 AT5 / 24	24	6F	ALUMINIO	38,40	37,00	42	24	30	36	8
36 AT5 / 25	25	6F	ALUMINIO	39,95	38,60	44	26	30	36	8
36 AT5 / 26	26	6F	ALUMINIO	41,60	40,20	44	26	30	36	8
36 AT5 / 27	27	6F	ALUMINIO	43,20	41,80	48	30	30	36	8
36 AT5 / 28	28	6F	ALUMINIO	44,75	43,35	48	32	30	36	8
36 AT5 / 30	30	6F	ALUMINIO	47,95	46,55	51	34	30	36	8
36 AT5 / 32	32	6F	ALUMINIO	51,10	49,70	54	38	30	36	8
36 AT5 / 36	36	6F	ALUMINIO	57,45	56,05	64	38	30	36	8
36 AT5 / 40	40	6F	ALUMINIO	63,85	62,45	66,5	40	30	36	8
36 AT5 / 42	42	6F	ALUMINIO	67,00	65,60	70	40	30	36	8
36 AT5 / 44	44	6	ALUMINIO	70,20	68,80		45	30	36	8
36 AT5 / 48	48	6	ALUMINIO	76,55	75,21		50	30	36	8
36 AT5 / 60	60	6	ALUMINIO	95,65	94,25		65	30	36	8



TRANSMISIONES
GALICIA

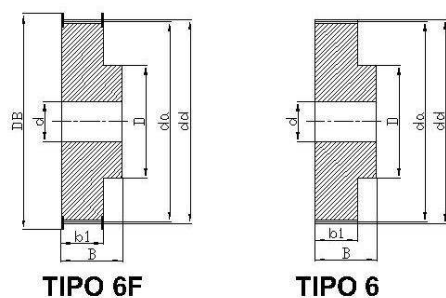

TIPO 6F

TIPO 6

TIPO 31 AT10 – PASO 10 MM PARA CORREA ANCHO 16 MM


POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
31 AT10 / 15	15	6F	ALUMINIO	47,90	45,90	51	32	21	31	8
31 AT10 / 16	16	6F	ALUMINIO	51,10	49,10	54	35	21	31	8
31 AT10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	21	31	8
31 AT10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	21	31	8
31 AT10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	21	31	8
31 AT10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	21	31	8
31 AT10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	21	31	8
31 AT10 / 25	25	6F	ALUMINIO	79,75	77,70	83	60	21	31	8
31 AT10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	21	31	8
31 AT10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	21	31	8
31 AT10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	21	31	8
31 AT10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	21	31	8
31 AT10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	21	31	10
31 AT10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	21	31	10
31 AT10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	21	31	10
31 AT10 / 44	44	6	ALUMINIO	140,20	138,20		88	21	31	10
31 AT10 / 48	48	6	ALUMINIO	152,95	150,95		95	21	31	16
31 AT10 / 60	60	6	ALUMINIO	191,15	189,10		110	21	31	16

TIPO 40 AT10 – PASO 10 MM PARA CORREA ANCHO 25 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
40 AT10 / 15	15	6F	ALUMINIO	47,90	45,90	51	32	30	40	8
40 AT10 / 16	16	6F	ALUMINIO	51,10	49,10	54	35	30	40	8
40 AT10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	30	40	8
40 AT10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	30	40	8
40 AT10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	30	40	8
40 AT10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	30	40	8
40 AT10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	30	40	8
40 AT10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	30	40	8
40 AT10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	30	40	8
40 AT10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	30	40	8
40 AT10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	30	40	8
40 AT10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	30	40	8
40 AT10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	30	40	10
40 AT10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	30	40	10
40 AT10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	30	40	10
40 AT10 / 44	44	6	ALUMINIO	140,20	138,20		88	30	40	10
40 AT10 / 48	48	6	ALUMINIO	152,95	150,95		95	30	40	16
40 AT10 / 60	60	6	ALUMINIO	191,15	189,10		110	30	40	16



TRANSMISIONES
GALICIA

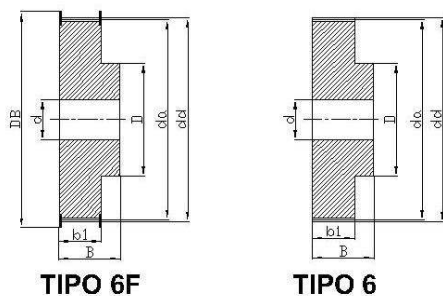

TIPO 6F

TIPO 6

TIPO 47 AT10 – PASO 10 MM PARA CORREA ANCHO 32 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
47 AT10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	37	47	10
47 AT10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	37	47	10
47 AT10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	37	47	12
47 AT10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	37	47	12
47 AT10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	37	47	12
47 AT10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	37	47	12
47 AT10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	37	47	12
47 AT10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	37	47	12
47 AT10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	37	47	12
47 AT10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	37	47	12
47 AT10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	37	47	12
47 AT10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	37	47	16
47 AT10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	37	47	16
47 AT10 / 44	44	6	ALUMINIO	140,20	138,20		88	37	47	16
47 AT10 / 48	48	6	ALUMINIO	152,95	150,95		95	37	47	16
47 AT10 / 60	60	6	ALUMINIO	191,15	189,10		110	37	47	16

TIPO 66 AT10 – PASO 10 MM PARA CORREA ANCHO 50 MM

POLEA	Z	MODELO	MATERIAL	d _d (mm)	d _a (mm)	D _B (mm)	D (mm)	b ₁ (mm)	B (mm)	d (MPB) (mm)
66 AT10 / 18	18	6F	ALUMINIO	57,45	55,45	60	40	56	66	10
66 AT10 / 19	19	6F	ALUMINIO	60,65	58,65	66	44	56	66	10
66 AT10 / 20	20	6F	ALUMINIO	63,80	61,80	66	46	56	66	12
66 AT10 / 22	22	6F	ALUMINIO	70,20	68,20	75	52	56	66	12
66 AT10 / 24	24	6F	ALUMINIO	76,55	74,55	83	58	56	66	12
66 AT10 / 25	25	6F	ALUMINIO	79,75	77,75	83	60	56	66	12
66 AT10 / 26	26	6F	ALUMINIO	82,90	80,90	87	60	56	66	12
66 AT10 / 27	27	6F	ALUMINIO	86,10	84,10	91	60	56	66	12
66 AT10 / 28	28	6F	ALUMINIO	89,25	87,25	93	60	56	66	12
66 AT10 / 30	30	6F	ALUMINIO	95,65	93,65	97	60	56	66	12
66 AT10 / 32	32	6F	ALUMINIO	102,00	100,00	106	65	56	66	12
66 AT10 / 36	36	6F	ALUMINIO	114,75	112,75	119	70	56	66	16
66 AT10 / 40	40	6F	ALUMINIO	127,45	125,45	131	80	56	66	16
66 AT10 / 44	44	6	ALUMINIO	140,20	138,20		88	56	66	16
66 AT10 / 48	48	6	ALUMINIO	152,95	150,95		95	56	66	16
66 AT10 / 60	60	6	ALUMINIO	191,15	189,10		110	56	66	16



TRANSMISIONES
GALICIA